

CHASER

11.6" Rugged Monitor



Waterproof



MIL-STD-810H





1000 nits



P-Cap

- ◆ 11.6" high-brightness PCAP 10-point multi-touch monitor with AR and AF coatings for better visibility
- ◆ Perfect your DeX optimized smartphone experience with a single plug
- ◆ Rich USB ports support additional external devices with one on top for easy reaching.
- ◆ Easy to switch between PC and smart phone input sources
- ◆ Night mode provides red monochrome to reduce eye strain.

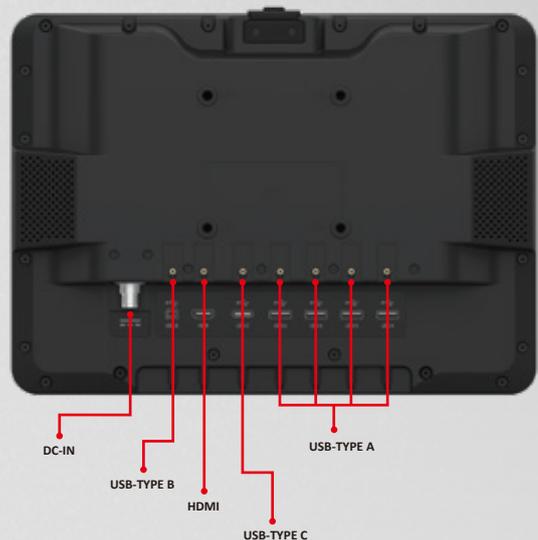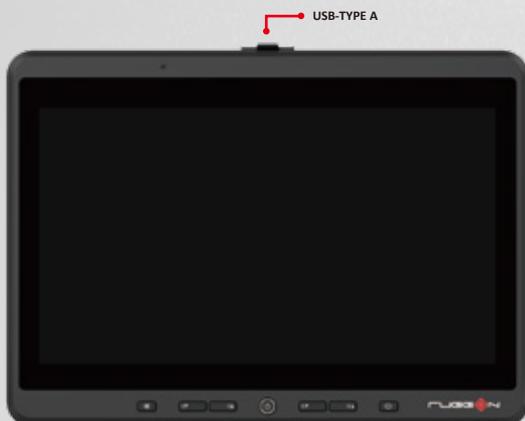

Specifications

Display

- ◆ 11.6" TFT LCD Full HD (1920 x 1080)
- ◆ 1000 nits high brightness
- ◆ Contrast Ratio: 1000:1
- ◆ Viewing Angle: 85°/85°/85°/85°
- ◆ Projected capacitive touchscreen with 10-point multi-touch
- ◆ Anti-reflective and anti-fingerprint coatings

Audio

- ◆ 3W stereo speakers with amplifier x 2

Control Button

- ◆ Black out x 1,
- ◆ Mute x 1, volume x 2, Brightness x 2
- ◆ Video input select x 1

Certifications

- ◆ CE
- ◆ FCC Class B
- ◆ E-Mark

Power

- ◆ 9-36 VDC @ Max 4A (12V Nominal)

I/O Interface

- ◆ USB2.0 type C x 1 (DisplayPort supported), USB 2.0 type A x 5, USB 2.0 type B x 1
- ◆ HDMI 1.4 x 1
- ◆ DC-in x 1

Rugged Feature

- ◆ Waterproof (front panel) and MIL-STD-810H certified
- ◆ Vibration and shock resistance

Environmental (Tested to MIL-STD-810H standards)

- ◆ Operating temperature : -20° C to +60° C
- ◆ Storage temperature : -30° C to +70° C
- ◆ Humidity : 95%, non-condensing

Mechanical Spec

- ◆ 75 mm VESA mount
- ◆ Dimension (W x H x D) : 296 x 216 x 43.5 (mm)
- ◆ Weight : 1.8 kg

In-box Accessories

- ◆ Power cable
- ◆ USB Type C to Type C Cable , 1 Meter (with screw lock on device side)
- ◆ HDMI Cable, 1 Meter
- ◆ Metal bracket for exterior cable entry

Optional Accessories

- ◆ USB 2.0 A-Male to A-Female Extension Cable, 1 Meter
- ◆ USB 2.0 Type B to Type A cable, 1 Meter

※ We suggest you buy the cables verified by RuggON



www.ruggon.com e-mail:info@ruggon.com

©2021 RuggON Corporation. All rights reserved. Specifications subject to change without notice.

V.21A